

Open Access Article

## Comparison between Fuzzy-logic MPPT and the Exciting Incremental Conductance Method under Fast Varying of Irradiance

Mohammed. S. Al-Mohamade\*, Hussein D. Al-Majali

Department of Electrical Engineering, Faculty of Engineering, Mu'tah University, Jordan

**Abstract:** In this research, a comparison between fuzzy logic (FL) and incremental conductance (INC) for photovoltaic module maximum power point tracking (MPPT) is presented. The mathematical analysis of the photovoltaic (PV) for the single-diode circuit and the DC/DC boost converter is conducted. The proposed PV system is simulated using MATLAB/Simulink software to test the performance of the proposed FL-MPPT technique under different irradiance levels. Moreover, the fast change profile for irradiance is applied to both techniques to show the dynamic response of the PV module for each technique. This paper aims to track the optimum power of the PV module under fast varying irradiance using FL and traditional INC methods. Simulation results have shown that the proposed FL technique's main novelty is achieved by presenting good agreement for the MPPT by achieving the peak power with a shorter time and lower ripple resolution than the INC technique. The simulation results also show that the PV module has the best performance and higher efficiency when operated with the FL-MPPT technique.

**Keywords:** maximum power point tracking, incremental conductance, fast varying irradiance, boost converter, fuzzy logic.

### 輻照度快速變化下的模糊邏輯最大功率點跟踪與激勵增量電導法的比較

**摘要：**在這項研究中，比較了用於光伏模塊最大功率點跟踪的模糊邏輯和增量電導。對單二極管電路和直流電/直流電升壓轉換器的光伏進行了數學分析。使用矩陣實驗室/模擬鏈接軟件對所提出的光伏系統進行仿真，以測試所提出的模糊邏輯最大功率點跟踪技術在不同輻照度水平下的性能。此外，輻照度的快速變化曲線適用於兩種技術，以顯示光伏模塊對每種技術的動態響應。本文旨在使用模糊邏輯和傳統增量電導方法跟踪快速變化輻照度下光伏組件的最佳功率。仿真結果表明，所提出的模糊邏輯技術的主要新穎性是通過與增量電導技術相比，以更短的時間和更低的紋波分辨率實現峰值功率，從而為最大功率點跟踪提供良好的的一致性。仿真結果還表明，採用模糊邏輯最大功率點跟踪技術運行時，光伏組件具有最佳性能和更高的效率。

**关键词：**最大功率點跟踪、增量電導、快速變化的輻照度、升壓轉換器、模糊邏輯。

## 1. Introduction

Nowadays, renewable energy sources such as Photovoltaic (PV) energy sources are most commonly used in different countries. PV energy is harnessed by using the PV cells meant by the photo (light) and voltaic (voltage) [1]. Furthermore, a solar PV cell is a silicon semiconductor device produced by two layers

of mobile carriers, electrons in the conduction band and holes in the valence band [2]. The produced power from the PV cell is small, and therefore in this technology, more PV cells are connected in series to form a panel to increase the overall PV voltage. After that, several panels are integrated into parallel to raise the panel's current and forms arrays [2-4]. The

Received: August 26, 2021 / Revised: October 21, 2021 / Accepted: November 18, 2021 / Published: December 30, 2021

About the authors: Mohammed. S. Al-Mohamade, Hussein D. Al-Majali, Department of Electrical Engineering, Faculty of Engineering, Mu'tah University, Jordan

Corresponding author: Mohammed. S. Al-Mohamade, [engmsd@yahoo.com](mailto:engmsd@yahoo.com)

nonlinear characteristics of the PV cell are utilized because it is affected by irradiation and the ambient temperature.

An increase in ambient temperature causes the PV voltage to decrease due to the negative sign of the voltage coefficient based on ambient temperature, which leads to a decrease in PV power. On the other hand, the increase in ambient temperature makes the current increase slightly. Unlike, if irradiation value is increased, the current will become large, which makes the output power extracted from the PV large because the current is proportional directly to irradiance, but these changes in the irradiance make the PV voltage expose little increasing [5, 6]. These nonlinear characteristics of the PV module required a robust controller to track the optimal point of the power-voltage (P-V) and the current-voltage (I-V) curves under different weather conditions. Recently, a maximum power point tracking controller (MPPT) technique has been used for this objective [7]. Several researchers are proposed and reviewed different MPPT techniques. However, selecting an MPPT technique may have limitations such as cost, response speed, complexity, oscillation around the MPP, sensors.

However, the recent MPPT techniques that available in the market such as perturb and observe (P&O) [8, 9], incremental conductance (IC) [10, 11], fractional open-circuit voltage, fractional short-circuit current [12, 13], Hill Climbing (HC) [14] have fewer advantages in terms of the efficiency. Unlike artificial intelligence techniques such as fuzzy logic systems, neural networks, adaptive fuzzy-neural are considered the attractive solution for this purpose [15-19]. In this paper, an FL-MPPT technique has good efficiency compared to incremental conductance (INC). Also, MATLAB/Simulink software is used to validate and simulate the overall PV system used in this research. Moreover, the DC/DC boost converter is analyzed and studied theoretically to enhance the MPPT techniques. Then, the output power of the PV system is maximized using a more efficient FL-MPPT technique for fast values of solar irradiance. Many researchers used new techniques to convert DC to AC to link with the grid [20, 21], and other researchers used an HVDC system to convert AC to DC.

## 2. Photovoltaic Module Modeling

The PV cell equivalent circuit called the single-diode model is utilized in this research as presented in Fig. 1. In this mode, the recombination loss produced in the semiconductor materials for the depletion region is negligible [18-21]. The simplicity of this model represents the main advantage of this model and makes it suitable for different PV applications.

However, series and shunt resistors are inserted into the single-diode model to report the electrical circuit's silicon material and leakage current losses. Moreover,

from the theory of semiconductors, the Shockley diode equation that represents the I-V characteristic of the ideal PV cell is [19]:

$$I_{pv} = I_{ph} - I_0 \left[ \exp \left( \frac{q V_{pv}}{\alpha K T} \right) - 1 \right] \quad (1)$$

where  $V_{pv}$  is the PV cell voltage,  $I_{ph}$  – the photocurrent source,  $I_0$  – the reverse saturation current of the diode,  $q$  – the charge of electron ( $1.60217646 \times 10^{-19}C$ ),  $\alpha$  – the diode ideality factor ( $\alpha = 1.3$ ),  $K$  – the constant of Boltzmann ( $1.3806503 \times 10^{-23} J/^{\circ}K$ ) and the ambient temperature in  $^{\circ}K$  is denoted by  $T$ .

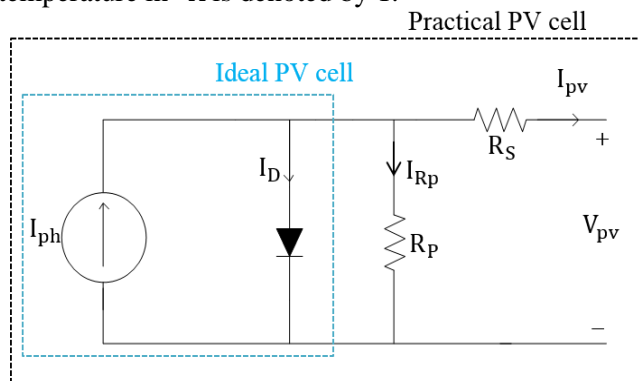


Fig. 1 Single-diode model

The main PV panel current can be written as [19, 20]:

$$I_{pv} = I_{ph} - I_0 \left[ \exp \left( \frac{q V_{pv}}{\alpha V_T} \right) - 1 \right] - \frac{V_{pv} + R_s I_{pv}}{R_p} \quad (2)$$

The source of photocurrent of PV module ( $I_{ph}$ ) depends mainly on irradiance, and it is affected little by the temperature according to the following equation [18, 19].

$$I_{ph} = (I_{phn} + K_i \Delta T) \frac{G}{G_n} \quad (3)$$

where  $I_n$  is the photocurrent at Standard Test Conditions (STC),  $\Delta T$  is the temperature change and  $G_n = 1000W/m^2$  at STC conditions. Also,  $K_i$  represents the coefficient for the temperature in the case of short circuit current. Several researchers have assumed that the source photocurrent ( $I_{ph}$ ) is the same for the short circuit current ( $I_{sc}$ ), assuming a low value of the series resistance and a higher parallel resistance value. An improved equation that defined the diode current for saturation case can be written as [12, 19]:

$$I_0 = \frac{(I_{scn} + K_i \Delta T)}{\exp \left[ \frac{(V_{ocn} + K_v \Delta T)}{\alpha V_T} \right] - 1} \quad (4)$$

where  $K_v$  is an open-circuit voltage coefficient. Furthermore, the terms of the equation can be defined as:

- $I_D$  is the current of the diode
- $I_{Rp}$  is the parallel resistance current
- $V_T (= N_s K T / q)$  is the thermal voltage (25.7 mV at  $25^{\circ}C$ ) with  $N_s$  number of cells.

- $R_p$  and  $R_s$  are parallel and series resistances, respectively.

### 3. MPPT Techniques

#### 3.1. Incremental Conductance Technique

The main target of the INC technique is to derive the relationship between the voltage and power of the PV panel under different weather conditions. This relation can be defined by the change in power to the change in the voltage as  $dP/dV$ . Moreover, based on the operating point of the PV panel, the MPP is detected when the derivative becomes zero, as illustrated in Fig. 2 [18]. The INC algorithm can be desired based on the slope of the I-V curve. Hence, the slope on the left side of MPP is negative, while the positive slope of the derivative becomes on the right side of the MPP that means the operating point of the PV moves according to the state of the change of the voltage with power and MPP is achieved by increasing duty cycle of the converter until the  $dP/dV$  becomes zero [11].

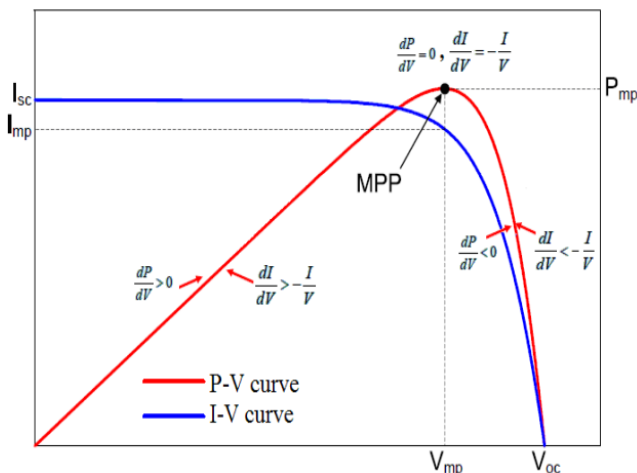


Fig. 2 I-V and P-V curves for INC algorithm

The main drawback in the INC technique is the instability and oscillation that occurred due to the operation derivative. Another point occurred in the INC, which is influenced during the low values of the irradiance. In order to show the relation between the current and voltage across the INC algorithm, the following expressions are written:

$$\begin{cases} \frac{dI}{dV} = -\frac{I}{V} & \text{At MPP} \\ \frac{dI}{dV} > -\frac{I}{V} & \text{Left of MPP} \\ \frac{dI}{dV} < -\frac{I}{V} & \text{Right of MPP} \end{cases}$$

#### 3.2. Fuzzy Logic Technique

FL-MPPT is one of the artificial MPPT techniques used to track the MPP of the PV panel under different values of irradiance and temperature. FL-MPPT is used mostly due to its advantages, such as the nonlinear control method, robust in low irradiance levels, and

operated with imprecise inputs [15, 16]. On the other hand, the designer should build the FL-MPPT technique because it needs more experience and knowledge to select the specified inputs and produce the rule-base table. An adaptive FLC is considered to produce the optimal memberships (MFs) and the table of the rule-base to obtain the target performance under various irradiance and ambient temperature values. Moreover, the general behavior of the FL-MPPT technique is affected by the shape of MFs used in the simulation. For this reason, in this paper, the triangular membership functions are used to utilize the complex computation process in the simulation. In order to understand the behavior of the FL technique, a general block in Fig. 3 is presented.

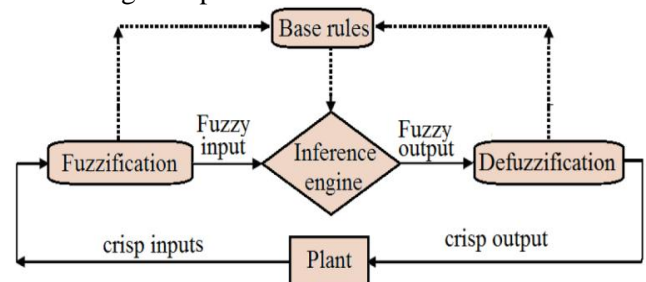


Fig. 3 Fuzzy logic diagram

The FL technique can generally be summarized into four sections: fuzzification, an inference engine, a rule base unit, and defuzzification. In this paper, the inputs of the proposed FL-MPPT are the error  $E$  and the change in the error  $\Delta E$  used to implement the FL algorithm and track the MPP during the simulation. In addition, FL has a single output variable, which is the change in the duty cycle  $\Delta D$  for the boost converter. So, the error can be written as:

$$E = \frac{P(k) - P(k-1)}{V(k) - V(k-1)} = \frac{\Delta P}{\Delta V} = \frac{\Delta I}{\Delta V} + \frac{I}{V} \quad (5)$$

where  $P(k)$  and  $V(k)$  are the power and voltage of the PV panel, respectively. Also, the error can be expressed as:

$$\Delta E = E(k) - E(k-1) \quad (6)$$

Furthermore, FL generates the next operating point based on the MFs and its table of the rules by these variables. So, the most far operating point is shown according to the one input ( $E$ ), which tells the algorithm information on how to track the MPP and extract the maximum optimal power from the PV panel. On the other hand, the second input  $\Delta E$  decides how fast the operating point is moving to the right side or the left side of the MPP on the I-V and P-V curves. As a result, when the  $E$  value is positive, the duty cycle of the boost converter is changed to raise the PV voltage until it reaches to MPP point. Unlike if the  $E$  value is negative, according to the algorithm, the duty cycle will change to decrease the PV voltage until it reaches an MPP point again. As discussed before, the

fuzzy rules table is proposed for inputs of the error and the change in the error, which are negative big (NB), negative small (NS), zero (Z), positive small (PS), and positive big (PB). The flowchart of the proposed FL-MPPT technique used in this work is shown in Fig. 4

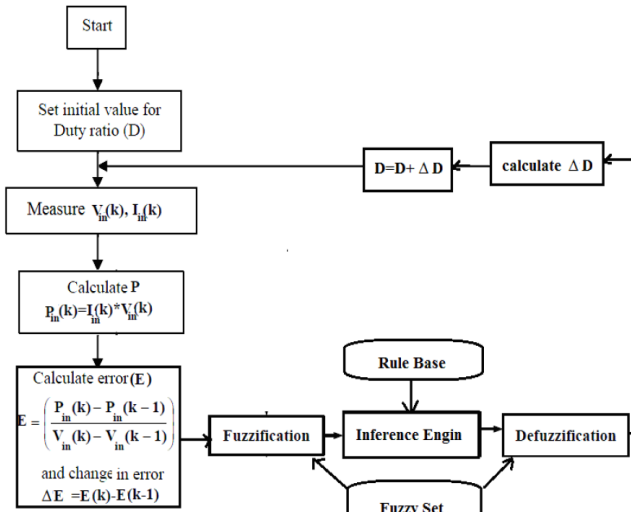


Fig. 4 Flowchart of the FL-based MPPT

#### 4. DC/DC Boost Converter

Boost converter or step-up converter is widely used in PV applications such as MPPT controller as shown in Fig. 5. Fig. 6 illustrates the boost converter's electrical circuit, consisting of an inductor, single diode, semiconductor switch like MOSFET or IGBT, and input and output capacitors [21]. Moreover, the MOSFET of the boost converter is controlled by adjusting the duty cycle  $d$  during the ON/OFF state operation. Therefore, the principal action of this converter can be divided into two. When the switch is ON, current flows in the inductor and switch, and then energy is stored in magnetizing the inductor inductance. After that, when the PWM signal is removed, this energy will deliver to the output load through the output capacitor filtered by the output waveform [19, 21]. In order to show the mathematical behavior of the boost converter, continuous conduction CCM mode is used in this work. The voltage and current waveforms during CCM mode are indicated in Fig. 7.

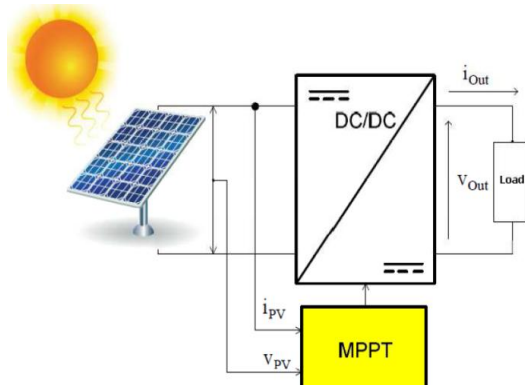


Fig. 5 Boost converter with MPPT controller

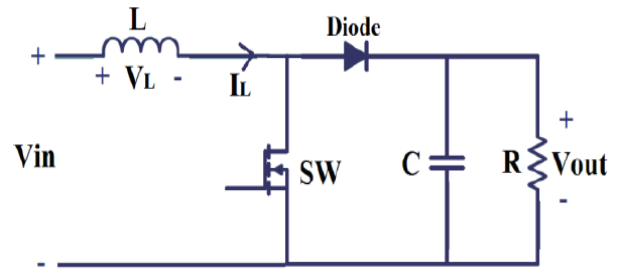


Fig. 6 Electrical circuit of the boost converter

The relationship between the output and input voltage is expressed as [21].

Table 1 Boost converter parameters

| Parameter        | Value   |
|------------------|---------|
| L                | 1.8 mH  |
| C <sub>o</sub>   | 100 μF  |
| f <sub>s</sub>   | 5000 Hz |
| C <sub>in</sub>  | 220 μF  |
| d <sub>max</sub> | 0.8     |

$$V_0 = \frac{1}{1-d} V_{in} \quad (7)$$

$$I_0 = I_L (1-d) \quad (8)$$

In order to calculate the parameters of the boost converter at CCM mode the equation 2.8 should be investigated as:

$$L = \frac{V_{in} d}{f_s \Delta I_L} \quad (9)$$

where  $f_s$  is the switching frequency, and  $\Delta I_L = 0.3I_L$ . In addition, the output capacitor can be determined from the following equation [19]:

$$C_0 = \frac{I_0 d}{f_s \Delta V_0} \quad (10)$$

where  $\Delta V_0 = 0.02V_0$ . So, the selection of  $C_0$  must be higher than the determined value to sure that the ripple in the output voltage of the boost converter remains with the specific range. Also, the input capacitor is very important to decoupling the PV power and reducing the harmonics in its voltage so that it can be calculated from the following equation [19]:

$$C_{in} \geq \frac{d}{8 f_s^2 \times L \times 0.01} \quad (11)$$

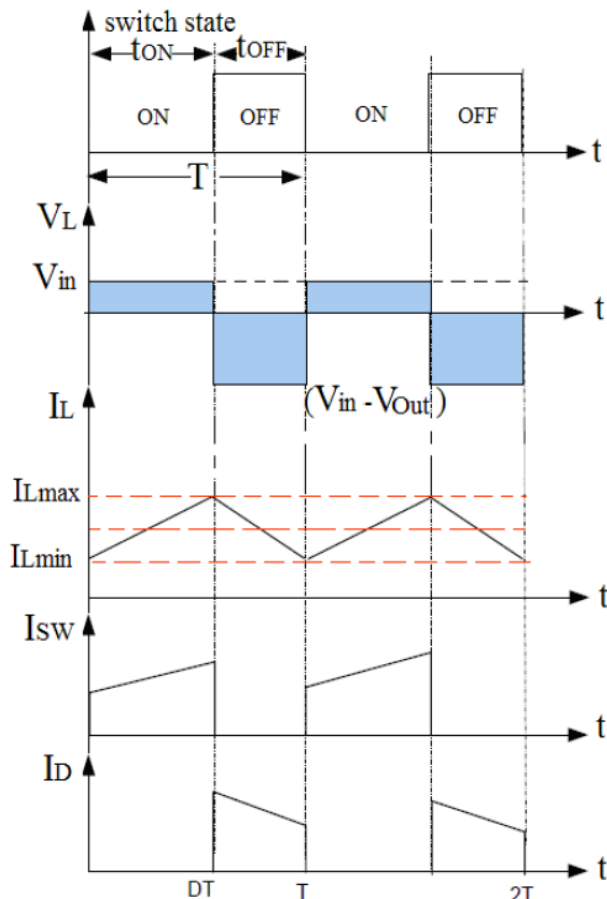


Fig. 7 Waveforms of the voltage and current during CCM mode

However, the boost converter design is obtained based on the previous equations.

### 5. Simulation Results and Comparison

In order to verify the proposed work, MATLAB/Simulink software is used to validate and test the proposed PV system with the MPPT techniques used here, as presented in Fig. 8. In this research, both INC and FL MPPT techniques are used to track the output power of the 200W PV module type KC200GT under different weather conditions. Fig. 9 shows the PV module curves under varying values of the irradiance and fixed temperature, while Fig. 10 presents the PV module curves for various temperatures and constant irradiance. The Simulink model of the boost converter used in this paper is shown in Fig. 11. As shown, the boost converter is controlled by the MPPT duty cycle to estimate the maximum power from the PV system by the PI controller, reducing the error between the estimated and measured PV voltages. As presented in Fig. 12, the INC-MPPT algorithm is modeled using the m-file function, and the parameters of the PI controller are obtained by trial and error method, which is obtained as  $K_p = 0.9$  and  $K_i = 0.04$ .

In addition, the FL-MPPT algorithm is implemented using MATLAB/Simulink, as presented in Fig. 13. Hence, the voltage and the PV system current are

sensed and then used to calculate the PV power to calculate the error and the change in the error. The PWM block of 5000 kHz is used to generate the proper pulses of the duty cycle for the boost converter. Also, the rules editor of the FL is indicated in Fig. 14. The MFs of the input and output variables of the FLMPPT controller used in this work are shown in Fig. 15. The input variables are represented by the PV,  $V_n$ , and output power of the PV system  $P_n$  while the output variable is the duty cycle of the boost converter  $D$ .

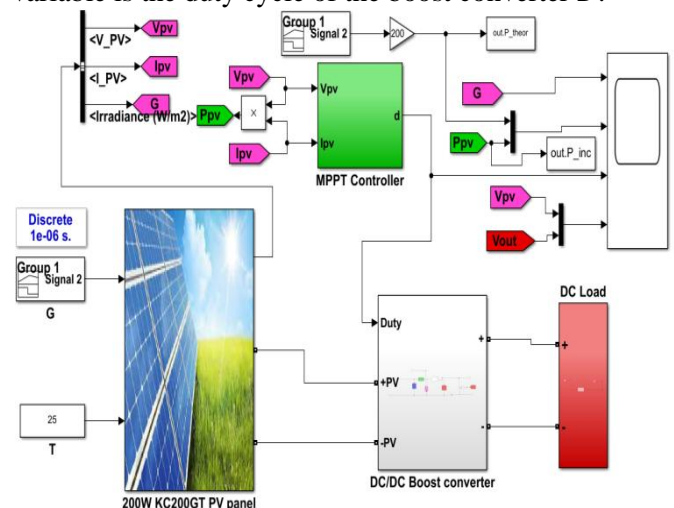


Fig. 8 Proposed PV system with MPPT techniques

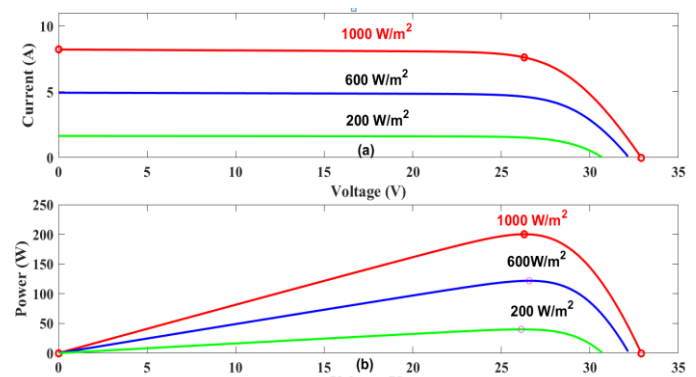


Fig. 9 I-V (a) and P-V (b) curves at various values of irradiance and fixed temperature  $T = 25^\circ\text{C}$

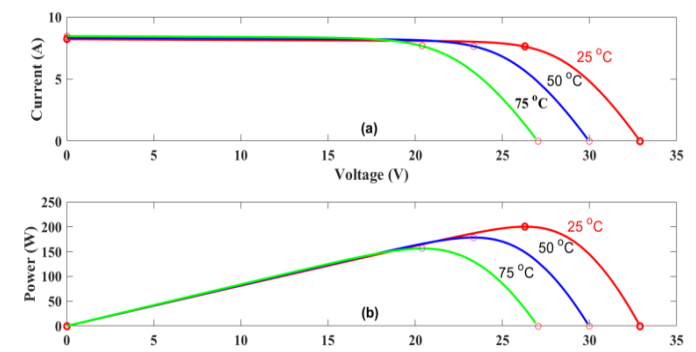


Fig. 10 I-V (a) and P-V (b) curves at varying temperature and fixed irradiance  $G = 1000 \text{ W/m}^2$

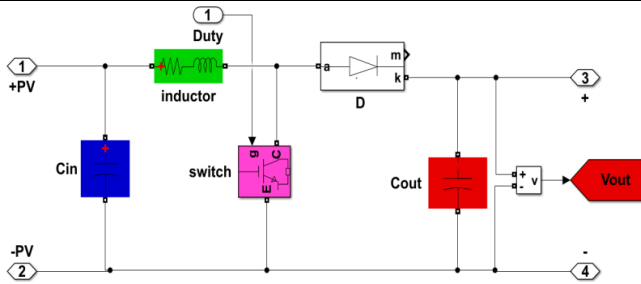


Fig. 11 Boost converter circuit in MATLAB/Simulink

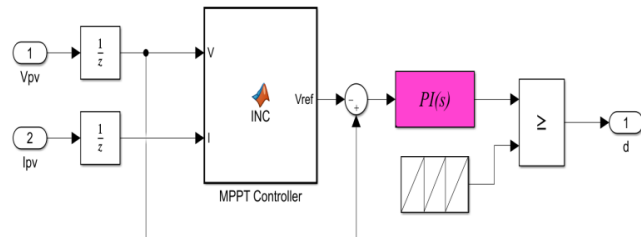


Fig. 12 Proposed INC-MPPT technique in MATLAB/Simulink

The relationship between the PV voltage and power and duty cycle in 3-D shape is presented in Fig. 16. As observed, the surfer graph shows the best performance for the proposed MPPT tracker during the simulation.

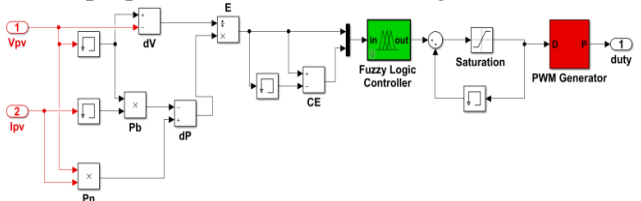


Fig. 13 Fuzzy logic MPPT technique model in MATLAB/Simulink

Fig. 14 Rule editor of fuzzy logic MPPT in MATLAB



Fig. 15 MFs of the input and output variables for fuzzy logic MPPT

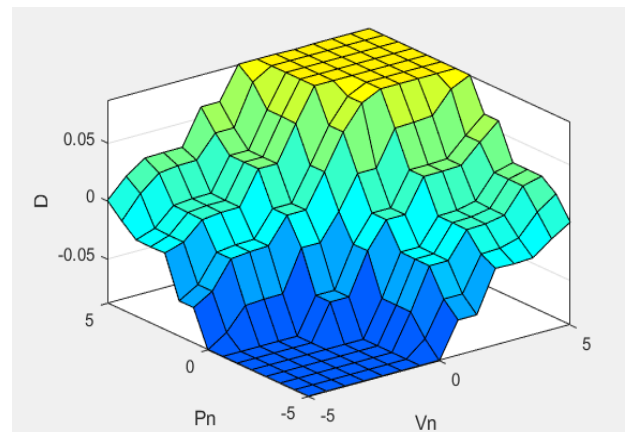


Fig. 16 Surface 3-D shape for fuzzy logic MPPT

In order to test the performance of the proposed MPPT techniques, the step change in solar irradiance  $G$  is used with constant temperature  $T = 25^\circ\text{C}$ . As observed in Fig. 17, the solar irradiance changes from a lower-level value of  $G = 200 \text{ W/m}^2$  at time  $t = 0.2\text{s}$  to  $G = 1000 \text{ W/m}^2$  at  $t = 0.6\text{s}$ . It is clear that PV voltage is little affected, and the boost converter increases due to irradiance increase from 40 to 85V. After that, the irradiance is moved from 1000 to 600  $\text{W/m}^2$  at  $t = 0.6\text{s}$  to  $t = 1\text{s}$ . Thus, more efficient power from the FL-MPPT is obtained compared to INC-MPPT. As a result, a large oscillation in INC-MPPT has occurred, and the speed of response is low. While the best performance is achieved using the FL-MPPT technique according to the theoretical power of the PV system, as reported in Fig. 18. As a result, the FL-MPPT technique is the best choice for the PV system used in DC load operation.

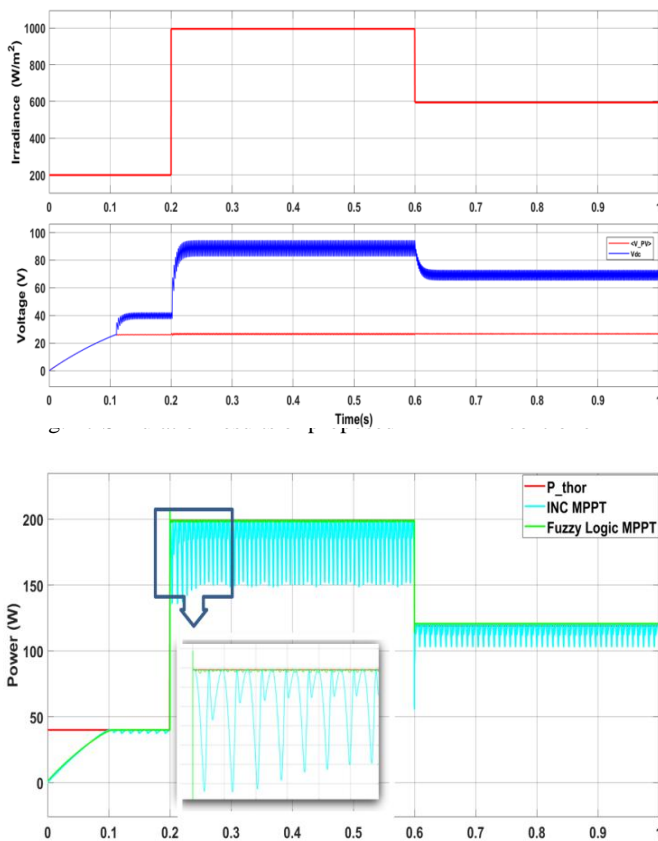


Fig. 18 Comparison between INC and FL MPPT techniques during the fast change in irradiance

## 6. Conclusion

In this research, a comparison between the intelligent fuzzy logic (FL) and conventional incremental conductance (INC) techniques based on maximum power point tracking (MPPT) for the photovoltaic (PV) module is presented. First, the mathematical model of the PV circuit is studied, and DC/DC boost converter circuit is also analyzed to enhance the proposed work. Second, the entire proposed system is modeled and simulated in MATLAB/Simulink including PV module, boost converter, and MPPT techniques. In order to validate the performance of the proposed FL-MPPT technique, a simulation with different weather conditions is done. Moreover, the fast change in solar irradiance is used to clear the dynamic response of the PV module under both FL and INC techniques. As a result, the proposed FL technique achieves the MPPT with the small-time response and lower ripple resolution. From the comparison, it is clear that the proposed FL-MPPT technique has well performance in maximizing the real power of the PV module during the fast change in the irradiance compared to the results of the traditional IC technique, which produce large oscillation and less speed response.

## References

[1] MOTAHHIR S., CHALH, A., GHZIZAL A., SEBTI S., and DEROUICH A. Modeling of photovoltaic panel by using proteus. *Journal of Engineering Science and*

*Technology Review*, 2017, 10: 8-13.

[2] SZEMES P.T, and MELHEM M. Analyzing and modeling PV with "P&O" MPPT Algorithm by MATLAB/SIMULINK. In: *2020 3rd International Symposium on Small-scale Intelligent Manufacturing Systems*, 2020. [Online] Available from: <https://ieeexplore.ieee.org/document/9121579>

[3] YAQOOB S.J., HUSSEIN A.R., and SALEH A.L. Low Cost and Simple P&O-MPP Tracker Using Flyback Converter. *Solid State Technology*, 2020, 63(6): 9676-9689.

[4] SHANG L., GUO H., and ZHU W. An improved MPPT control strategy based on incremental conductance algorithm. *Protection and Control of Modern Power Systems*, 2020, 5(1): 1-8.

[5] SALEH A.L., OBED A.A., HASSOUN Z.A., and YAQOOB S.J. Modeling and Simulation of A Low Cost Perturb & Observe and Incremental Conductance MPPT Techniques In Proteus Software Based on Flyback Converter. *IOP Conference Series: Materials Science and Engineering*, 2020, 881 (1): 012152.

[6] ASALA S., AL-DMOUR H.D., AL-MAJALI, and ZIYAD S. Staircase Modulation Using GWO Technique for CHB-MLI with Symmetrical and Asymmetrical Mode. *International Journal of Engineering Trends and Technology*, 2021, 69(8): 71-80.

[7] BAIMEL D., TAPUCHI S., LEVRON Y., and BELIKOV J. Improved fractional open circuit voltage MPPT methods for PV systems. *Electronics*, 2019, 8(3): 321.

[8] ALZALAN M.W., ALAWASA K.M., and AL-MAJALI H.D. Performance Evaluation of Different Optimal-Tuned Current Controllers for Voltage-Source Converter Connected to a Weak AC Grid. In: *IEEE Jordan International Joint Conference on Electrical Engineering and Information Technology*, 2019: 198-203.

[9] MOHAMMED M.S., AL-AWASA K.M., and AL-MAJALI H.D. Energy management and control in microgrid with hybrid energy storage systems by using PI and flatness theory. *International Journal of Engineering Trends and Technology*, 2021, 69(11): 227-235.

[10] JATELY V., AZZOPARDI B., JOSHI J., SHARMA A., and ARORA S. Experimental analysis of hill-climbing MPPT algorithms under low irradiance levels. *Renewable and Sustainable Energy Reviews*, 2021, 150: 111467.

[11] NASSER K.W., YAQOOB S.J., and HASSOUN Z.A. Improved dynamic performance of photovoltaic panel using fuzzy logic-MPPT algorithm. *Indonesian Journal of Electrical Engineering and Computer Science*, 2021, 21(2): 617-624.

[12] AOUCHE N., CHEIKH M.A., BECHERIF M., EBRAHIM M.A., and HADJARAB A. Fuzzy logic approach based MPPT for the dynamic performance improvement for PV systems. In: *2017 5th International Conference on Electrical Engineering – Boumerdes*, 2017. [Online] Available from: <https://ur.booksc.me/book/67841595/68be8f>

[13] AL-MAJALI H.D., AL-MAJALI B.H., and ALMAJALI Z.S. Reduced Harmonics Generated and Reactive Volt-Ampere absorption of HVDC Converter Using By-Pass Switch. *WSEAS Transaction on Control and Systems*, 2020, 15: 218-227. <https://www.wseas.org/multimedia/journals/control/2020/a465103-947.pdf>

[14] AL-MAJALI H.D. and AL-MAJALI B.H. Fast and Continuous Control of a Modified HVDC Converter. *WSEAS*

*Transaction on Control and Systems*, 2019, 19: 326-332.

[15] JIANG M., GHAREMANI M., DADFAR S., CHI H., ABDALLAH Y.N., and FURUKAWA N. A novel combinatorial hybrid SFL-PS algorithm based neural network with perturb and observe for the MPPT controller of a hybrid PV-storage system. *Control Engineering Practice*, 2021, 114: 104880.

[16] MOTAHHIR S., EL GHZIZAL A., SEBTI S., and DEROUICH A. Modeling of photovoltaic system with modified incremental conductance algorithm for fast changes of irradiance. *International Journal of Photoenergy*, 2018. [Online] Available from: <https://www.hindawi.com/journals/ijp/2018/3286479/>

[17] YAQOUB S.J., SALEH A.L., MOTAHHIR S., AGYEKUM E.B., ANAND N., and BASIT Q. Comparative study with practical validation of photovoltaic monocrystalline module for single and double diode models. *Scientific Reports*, 2021, 11: 19153. <https://doi.org/10.1038/s41598-021-98593-6>

[18] YAQOUB S.J., and OBED A.A. Modeling, Simulation and Implementation of PV System by Proteus Based on Two-diode Model. *Journal of Techniques*, 2019, 1(1): 39-51.

[19] ZHENG Y., and SMEDLEY K.M. Analysis and design of a single-switch high step-up coupled-inductor boost converter. *IEEE Transactions on Power Electronics*, 2019, 35(1): 535-545.

[20] SHAW P. Modelling and analysis of an analogue MPPT-based PV battery charging system utilizing dc-dc boost converter. *IET Renewable Power Generation*, 2019, 13(11): 1958-1967.

[21] JIA, Z., and LIU, C. Fractional-order modeling and simulation of magnetic coupled boost converter in continuous conduction mode. *International Journal of Bifurcation and Chaos*, 2018, 28(05): 1850061.

#### 參考文:

[1] MOTAHHIR S., CHALH, A., GHZIZAL A., SEBTI S. 和 DEROUICH A. 使用變形桿菌對光伏面板進行建模。工程科技評論, 2017, 10: 8-13.

[2] SZEMES P.T 和 MELHEM M. 通過矩陣實驗室/鏈接模擬使用“擾動和觀察”最大功率點跟踪算法對光伏進行分析和建模。在：2020年第三屆小型智能製造系統國際研討會, 2020年。[在線] 可從：<https://ieeexplore.ieee.org/document/9121579>

[3] YAQOUB S.J., HUSSEIN A.R. 和 SALEH A.L. 使用反激轉換器的低成本簡單擾動和觀察-大規模並行處理跟踪器。固態技術, 2020, 63(6): 9676-9689.

[4] SHANG L., GUO H., 和 ZHU W. 基於增量電導算法的改進 最大功率點跟踪控制策略。現代電力系統的保護與控制, 2020, 5(1): 1-8.

[5] SALEH A.L., OBED A.A., HASSOUN Z.A. 和 YAQOUB S.J. 基於反激轉換器的 變形蟲軟件中低成本擾動觀察和增量電導 最大功率點跟踪技術的建模和仿真。物理研究所系列會議：材料科學與工程, 2020, 881 (1) : 012152.

[6] ASALA S., AL-DMOUR H.D., AL-MAJALI 和 ZIYAD S. 使用灰狼優化器

技術對具有對稱和不對稱模式的級聯H橋-多層電感進行階梯調製。國際工程趨勢與技術雜誌, 2021, 69(8): 71-80.

[7] BAIMEL D., TAPUCHI S., LEVRON Y. 和 BELIKOV J. 改進的用於光伏系統的分數開路電壓最大功率點跟踪 方法。電子學, 2019, 8(3), 321.

[8] ALZALAN M.W., ALAWASA K.M. 和 AL-MAJALI H.D.用於連接到弱交流電網的電壓源轉換器的不同優化調諧電流控制器的性能評估。在：電氣和電子工程師學會 約旦國際電氣工程和信息技術聯合會議, 2019 : 198-203.

[9] 穆罕默德 M.S., AL-AWASA K.M. 和 AL-MAJALI H.D.基於比例積分和平坦度理論的混合儲能微電網能量管理與控制。國際工程趨勢與技術雜誌, 2021, 69(11): 227-235.

[10] JATELY V., AZZOPARDI B., JOSHI J., SHARMA A. 和 ARORA S. 低輻照度下爬山 最大功率點跟踪算法的實驗分析。可再生能源和可持續能源評論, 2021 , 150 : 111467.

[11] NASSER K.W., YAQOUB S.J. 和 HASSOUN Z.A. 使用模糊邏輯- 最大功率點跟踪算法提高光伏電池板的動態性能。印度尼西亞電氣工程與計算機科學雜誌, 2021, 21(2): 617-624.

[12] AOUCHECHE N., CHEIKH M.A., BECHERIF M., EBRAHIM M.A. 和 HADJARAB A. 基於模糊邏輯方法的最大功率點跟踪, 用於光伏系統的動態性能改進。在：2017 第五屆電氣工程國際會議 - 布默德斯, 2017。[在線] 可從：<https://ur.booksc.me/book/67841595/68be8f>

[13] AL-MAJALI H.D., AL-MAJALI B.H. 和 ALMAJALI Z.S.

使用旁路開關的高壓直流轉換器減少諧波產生和無功伏安吸收。世界科學與工程學院和社會控制與系統彙刊, 2020, 15 : 218-227.

<https://www.wseas.org/multimedia/journals/control/2020/a465103-947.pdf>

[14] AL-MAJALI H.D. 和 AL-MAJALI B.H. 改進的高壓直流轉換器的快速和連續控制。世界科學與工程學院和社會控制與系統交易, 2019, 19 : 326-332.

[15] JIANG M., GHAREMANI M., DADFAR S., CHI H., ABDALLAH Y.N., 和 FURUKAWA N. 一種基於混合混合洗牌青蛙跳躍和模式搜索

算法的新型組合式混合混合洗牌青蛙跳躍和模式搜索算法的神經網絡, 用於混合 光伏-的 最大功率點跟踪控制器的擾動和觀察存儲系統。控制工程實踐, 2021, 14 : 104880.

[16] MOTAHHIR S., EL GHZIZAL A., SEBTI S. 和 DEROUICH A.

採用改進的增量電導算法對輻照度快速變化的光伏系統建模。國際光能雜誌，2018年。[在線]

來自：<https://www.hindawi.com/journals/ijp/2018/3286479/>

[17] YAQOOB S.J.、SALEH A.L.、MOTAHHIR S.、AGYEKUM E.B.、ANAND N. 和 BASIT Q. 用於單二極管和雙二極管模型的光伏單晶模塊實際驗證的比較研究。科學報告，2021年，11：19153。https://doi.org/10.1038/s41598-021-98593-6

[18] YAQOOB S.J. 和 OBED A.A. 基於雙二極管模型的變形蟲光伏系統建模、仿真與實現。技術雜誌，2019，1(1)：39-51。

[19] ZHENG Y. 和 SMEDLEY K.M. 單開關高升壓耦合電感升壓變換器的分析與設計。

電氣和電子工程師學會電力電子交易，2019，35(1)：535-545。

[20] SHAW P. 利用直流-直流升壓轉換器對基於模擬最大功率點跟踪的光伏電池充電系統進行建模和分析。

工程技術學會可再生能源發電，2019，13(11)：1958-1967。

[21] JIA, Z. 和 LIU, C. 連續導通模式下磁耦合升壓轉換器的分數階建模和仿真。國際分岔與混沌雜誌，2018，28(05)：1850061。